

## Spike XD-2 Firmware Update - Mac OS 10.3

**Note:** The XD-2 driver and software files available for download from the Mackie website are a disk image. You will need to mount the disk image.

**Step 1:** Click the appropriate link to download the DMG file for the XD-2 Firmware.

**Step 2:** When the download has completed, double-click the DMG file to mount the disk image onto the desktop of your computer (your computer may mount the disk image automatically when downloading completes).


**Step 3:** With the XD-2 connected to the computer and powered on, launch the XD-2 SoftApp. From the **XD-2** menu select **About XD-2**.




**Step 4:** Select the Version/Update tab and click the **Upgrade Firmware...** button.



**Step 5:** Browse to and select the appropriate firmware file located in the disk image mounted on your desktop, then click **Choose**.

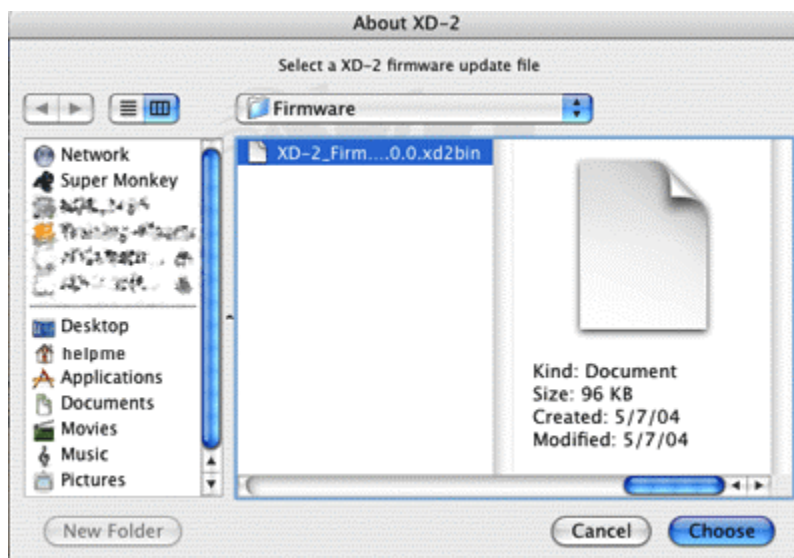


**Step 6:** Click the **Update** button. (note: During the firmware upgrade the XD-2 must not be unplugged or turned off.)

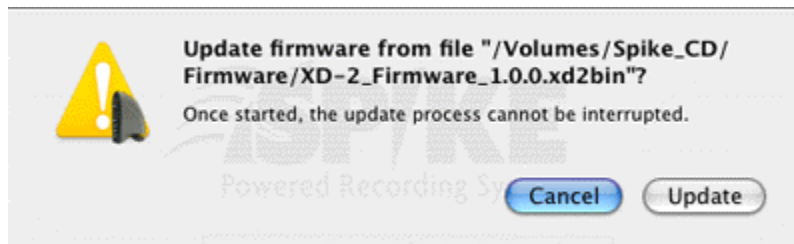

- The LED lights on the XD-2 will start flashing as the XD-2 is rebooted and the Firmware updates.



And then...

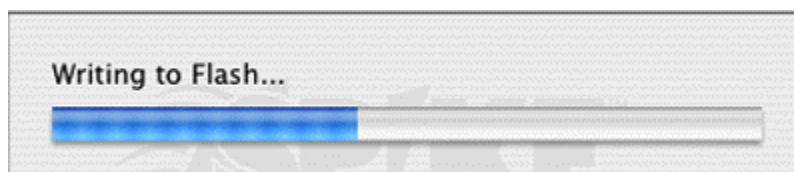

- Once complete, the message Update Complete will appear in the Version/Update window. Click **Close**.

